


City of Hesperia BUILDING AND SAFETY DIVISION

Retaining Wall Cantilevered Footing

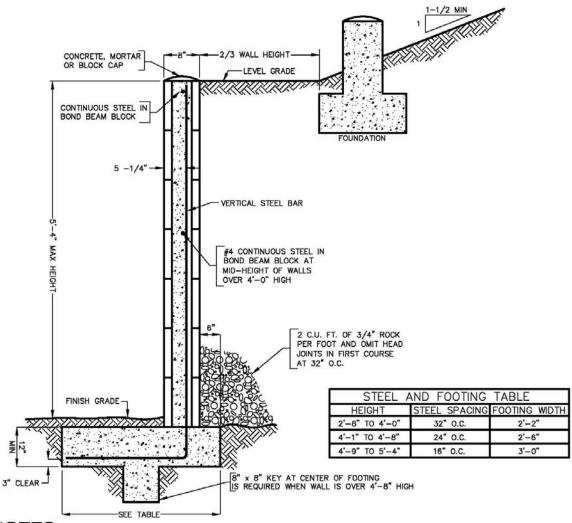

NOTES:

- 1. ALL SURCHARGE LOADS ON THE FILL SIDE SHALL BE KEPT BACK FROM THE WALL A DISTANCE EQUAL TO TWO—THIRDS THE HEIGHT OF THE WALL.
- 2. BACKFILL MAY BE PLACED AFTER THE WALL HAS CURED FOR 14 DAYS.
- 3. ALL REINFORCING BARS ARE 1/2 INCH DEFORMED STEEL BARS.
- 4. EVERY OTHER VERTICAL REINFORCING BAR MAY BE STOPPED AT MID-HEIGHT.
- 5. REQUEST INSPECTION FOR FOOTING PRIOR TO PLACING CONCRETE.
- 6. REQUEST INSPECTION FOR STEEL IN WALL AND OBTAIN APPROVAL PRIOR TO GROUTING

ALTERNATIVE WALL:


 USE 8 INCH THICK POURED CONCRETE WITH 1/2 INCH REINFORCING BARS SPACED 18" O.C. BOTH WAYS. LOCATE STEEL 3 INCHES FROM THE FILL SIDE OF THE WALL. FOOTINGS PER TABLE.

NOTICE:

ALL PORTIONS OF WALL AND FOOTINGS MUST BE INSIDE THE PROPERTY LINES. (UNLESS THERE IS A NOTARIZED WRITTEN AGREEMENT FROM THE ADJOINING PROPERTY OWNERS)

BUILDING & SAFETY DIVISION

Retaining Wall Cantilevered with Footing Under Fill

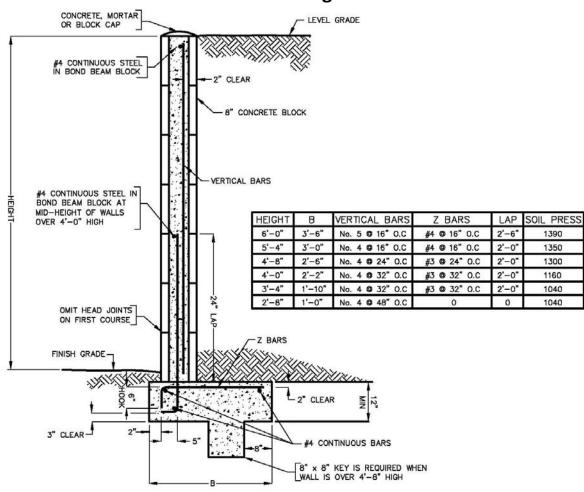

NOTES:

- 1. THE MAXIMUM ALLOWABLE HEIGHT IS 6'-0".
- 2. ALL CELLS ARE TO BE GROUTED SOILD. GROUT TO VIBRATED AND CONSOLIDATED.
- 3. BLOCK ARE TO BE LAID SO AS TO PROVIDE VERTICAL ALIGNMENT OF ALL CELLS. LAY BLOCK IN 1/2 BOND.
- 4. FOOTINGS TO BE DUG 12" MINIMUM INTO UNDISTURBED SOIL.
- 5. FOOTINGS WHERE THE SURFACE OF THE GROUND SLOPES MORE THAN 1 FOOT IN 10 FEET SHALL BE LEVEL OR SHALL BE STEPPED SO THAT BOTH TOP AND BOTTOM OF SUCH FOOTINGS ARE LEVEL.
- 6. REQUEST INSPECTION FOR FOOTING PRIOR TO PLACING CONCRET.
- 7. REQUEST INSPECTION FOR STEEL IN WALL AND OBTAIN APPROVAL PRIOR TO GROUTING
- 8. WALL IS NOT DESIGNED FOR SURCHARGE LOADS. KEEP ANY AND ALL LOADS, EXCEPT LEVEL GRADE, A DISTANCE AT LEAST EQUAL TO THE HEIGHT OF THE WALL, AWAY FROM THE WALL.
- 9. OBTAIN FINAL INSPECTION AND APPROVAL.

NOTICE:

ALL PORTIONS OF WALL AND FOOTINGS MUST BE INSIDE THE PROPERTY LINES. (UNLESS THERE IS A NOTARIZED WRITTEN AGREEMENT FROM THE ADJOINING PROPERTY OWNERS)

BUILDING & SAFETY DIVISION